



Poly-crystalline Series 320W-350W

SN(320W-350W)-72P

MODULE DATASHEET



Company Introduction

Anhui Sine New Energy Co., Ltd, established in 2020, is a high-tech enterprise specialized in developing, designing and producing solar modules, we produce various kinds of solar modules with the following types of solar cell: 156.75mm*156.75mm, 158.7mm*158.75mm, 166mm*166mm, 182mm*182mm, 210mm*210mm. The power of our solar modules ranges from 270W poly to 590W mono half-cell, and all the modules is IEC 61215, IEC61730, CE, CB and PID free certified.

72pcs solar cells
156.75x156.75mm

Key Features



High conversion efficiency due to top quality wafers and advanced cells technology.



Selected encapsulating materials and stringent production process control ensures highly PID resistant.



Excellent withstanding harsh environments, such as salt mist, sand mist as well as ammonia etc.



Optimized system performance due to module level current sorting and 100% two times EL.



Special cell process ensures good performance under low irradiance conditions.




Highly transparent self-cleaning glass brings additional yield and easy maintenance.

Why Sine Energy

1. Variety kinds of modules to meet the diversified needs of our clients and the projects
2. High automatic production lines and advanced technology enables us to produce modules with consistent quality
3. Stringent supplier audit and control as well as the BOM quality test.
4. Automatic materials filtration and sorting plus spot check every batch as well as 100% two times EL test
5. One stop solution to all the solar needs of our clients.
6. Strong enterprise management system and reliable professional customer service.

Warranty

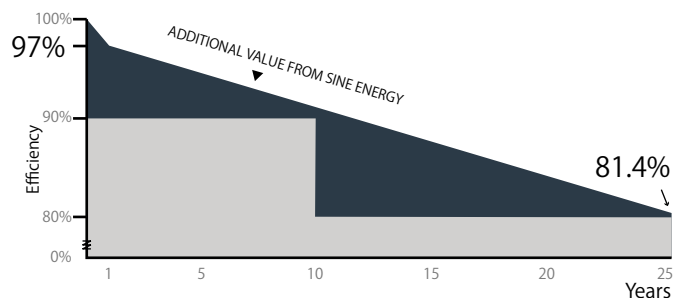

Guarantee on product material and workmanship



Linear power output warranty



SN(320W-350W)-72P

Electrical Specification (STC*)

Maximum Power -Pmax(W) :	320W	325W	330W	335W	340W	345W	350W
Maximum Power Voltage-Vmp(V):	37.81	38.06	38.33	38.62	38.91	39.18	39.45
Maximum Power Current-Imp(A):	8.46	8.54	8.61	8.68	8.74	8.81	8.87
Open Circuit Voltage -Voc(V):	45.86	46.04	46.36	46.43	46.73	46.98	47.23
Short Circuit Current-Isc(A):	8.92	9.04	9.11	9.26	9.31	9.39	9.48
Module Efficiency - η m(%):	16.49	16.75	17.00	17.26	17.52	17.78	18.08
Power Output Tolerance (W):							0+5W

STC:Irradiance:1000W/m², Module Temperature:25°C,Air Mass:1.5

Electrical Specification (NOCT*)

Maximum Power -Pmax(W) :	239W	242W	246W	250W	253W	256W	260W
Maximum Power Voltage-Vmp(V):	34.71	34.94	35.17	35.40	35.63	35.86	36.09
Maximum Power Current-Imp(A):	6.89	6.93	6.99	7.05	7.11	7.14	7.20
Open Circuit Voltage -Voc(V):	43.07	43.24	43.41	43.58	43.62	43.79	43.97
Short Circuit Current-Isc(A):	7.31	7.37	7.42	7.48	7.54	7.60	7.68

NOCT:Irradiance:800W/m², Ambient Temperature:20°C,Air Mass:1.5,Wind Speed:1m/s

Mechanical Specifications:

Solar Cell Type:	Poly-crystalline 156.75x156.75mm
Number of Cells:	72pcs (12x6)
Module Size:	1956*992*40mm
Weight:	22kg
Glass:	High transparency self-cleaning solar glass 3.2mm
Back Sheet:	White TPT
Frame:	Silver Anodized Aluminium Alloy
Junction Box:	IP67
Number of Diodes:	3pcs
Cable:	4.0mm ² 900mm
Connector:	MC4 Compatible
Wind/Snow Load:	2400pa/5400pa

Temperature Coefficient:

Nominal Operating Cell Temp(NOCT):	45±2°C
Temperature Coefficient of ISC:	0.060%/°C
Temperature Coefficient of VOC:	-0.30%/°C
Temperature Coefficient of Pmax:	-0.39%/°C

Maximum Ratings

Operational Temperature:	-40~85°C
Maximum System Voltage:	1500V DC(IEC)
Maximum Series Fuse Rating:	20A



Optional:

Connector:	MC4 Original
Backsheet:	Black/Transparent TPT
Frame:	Black Anodized Aluminium Alloy


Packaging Information:

Number per Box:	27PCS
Number per 20GP:	270PCS
Number per 40GP:	648PCS
Number per 40HC:	712PCS

Engineering Drawings

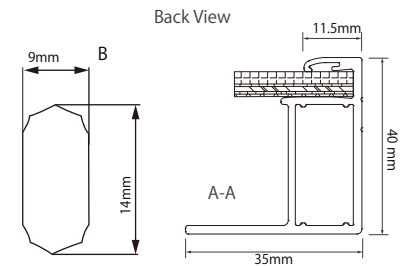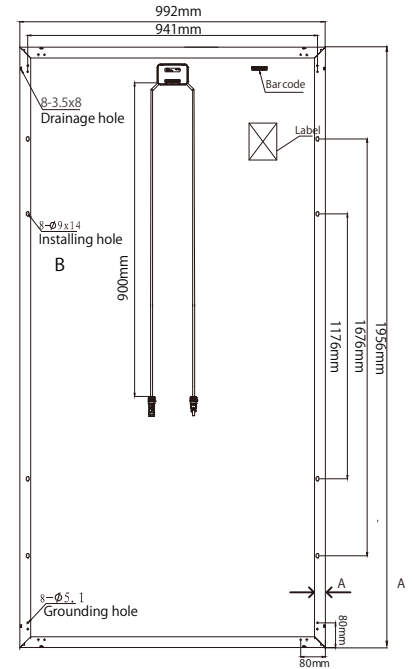

U-I Curve at Different Temperature(350W)

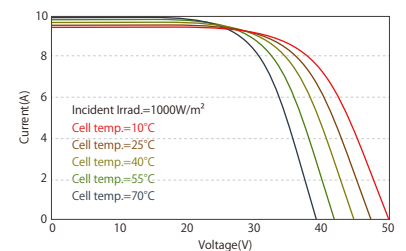

U-I/P-U Curve at Different Irradiation(350W)

