

## LIO II-4810 is Lithium-ion battery module specially designed for energy storage system with 48V system


- Lithium Iron Phosphate (LFP) cell guarantees safety and reliability
- Easy to install on the floor
- Suitable for wide range of inverters with 48V system



**Compact size and Lightweight**  
Built-in Lithium Iron Phosphate (LFP) cell with less space and weight.



**Fast charging**  
Battery module can be fully charged in shorter time.




**Modular design for easy scalable**  
Battery module can be easily stacked and added for energy expansion.




**Maximum Lifecycle**  
8000 cycles is for 60% DOD with >50% capacity  
2000 cycles is for 90% DOD with >80% capacity


### System Diagram

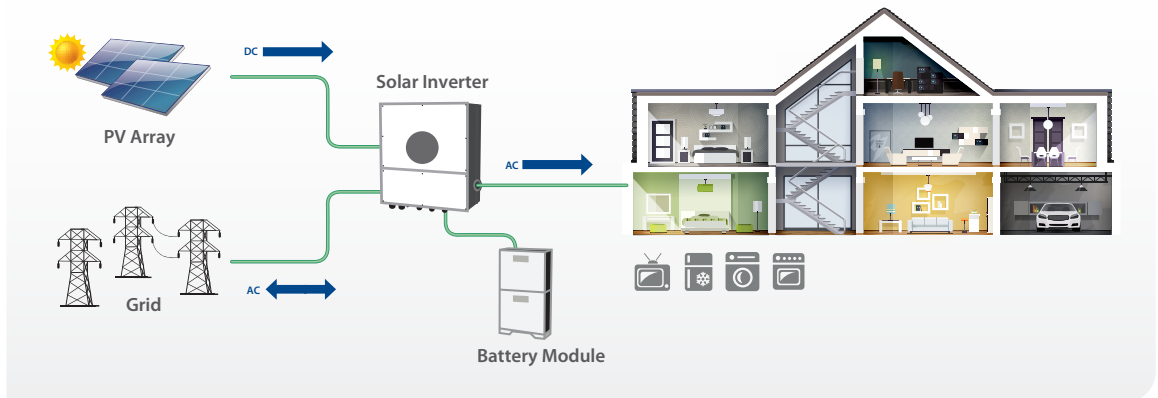

## Technical Selection Guide

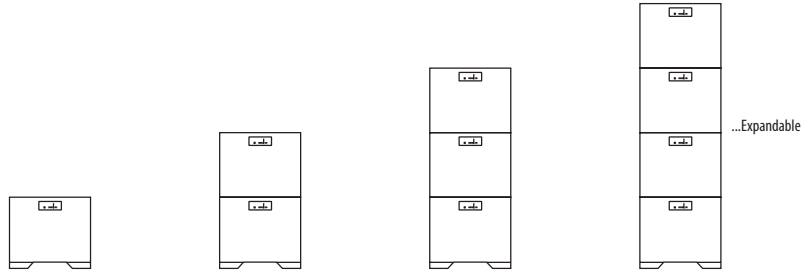

Battery Module	LIO II-4810 (5 kWh, 51.2V)			
Battery Cell Technology	Lithium Iron Phosphate			
Applicable Inverter Rating	≤ 5.6 kW			
Number of Module	1	2	3	4
Usable Energy	5 kWh	10 kWh	15 kWh	20 kWh
Rated Discharging Current	150 A	150 A	150 A	150 A
Peak Discharging Current	192 A, 1 min	192 A, 1 min	192 A, 1 min	192 A, 1 min
Nominal Voltage	51.2 V	51.2 V	51.2 V	51.2 V
Operating Voltage	40 -56 VDC	40 -56 VDC	40 -56 VDC	40 -56 VDC
Charging Current	100A Max, 30A Default	100A Max, 30A Default	100A Max, 30A Default	100A Max, 30A Default
Dimension, D x W x H (mm) without feet	185 x 540 x 420	185 x 540 x 840	185 x 540 x 1260	185 x 540 x 1680
Net Weight (kg)	48	96	144	192

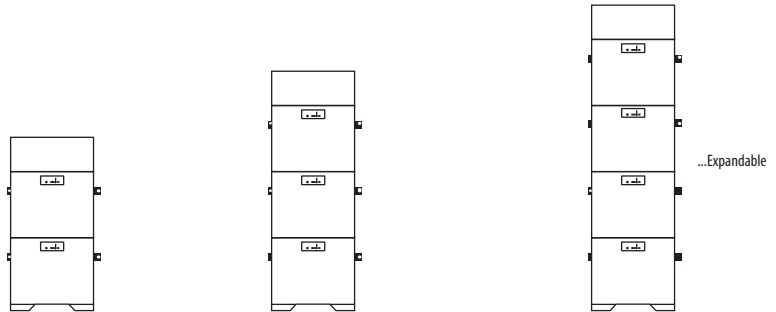

Battery Module	LIO II-4810 (5 kWh, 51.2V)		
Battery Cell Technology	Lithium Iron Phosphate		
Applicable Inverter Rating	6 kW ~ 12 kW		
Number of Module	2	3	4
Number of PDU Module	1	1	1
Usable Energy	10 kWh	15 kWh	20 kWh
Rated Discharging Current	300 A	300 A	300 A
Peak Discharging Current	384 A, 1 min	384 A, 1 min	384 A, 1 min
Nominal Voltage	51.2 V	51.2 V	51.2 V
Operating Voltage	40 - 56 VDC	40 - 56 VDC	40 - 56 VDC
Dimension, D x W x H (mm) without feet	185 x 540 x 1040	185 x 540 x 1460	185 x 540 x 1880
Net Weight (kg)	102	150	198

## General Specification

Operation Temperature	Charge	0°C~50 °C
	Discharge	0°C~50 °C
Storage Temperature (At 50% SOC and specified temp, recoverable capacity in % vs time / 50%)	< 18 months:	-20°C~25 °C
	< 3 months:	25°C~45 °C
	< 1 months:	45°C~60 °C
	20°C ± 5 °C is the recommended storage temperature	
IP Protection	IP20	
Communication	RS485 port (RJ45), CAN	
Certifications	UN38.3, IEC 62619	

Product specifications are subject to change without further notice.